


## Силовые кабели L2P-3m, L2P-6m, L2P-10m, CABLE-RZ3M0-H, CABLE-RZ6M0-H

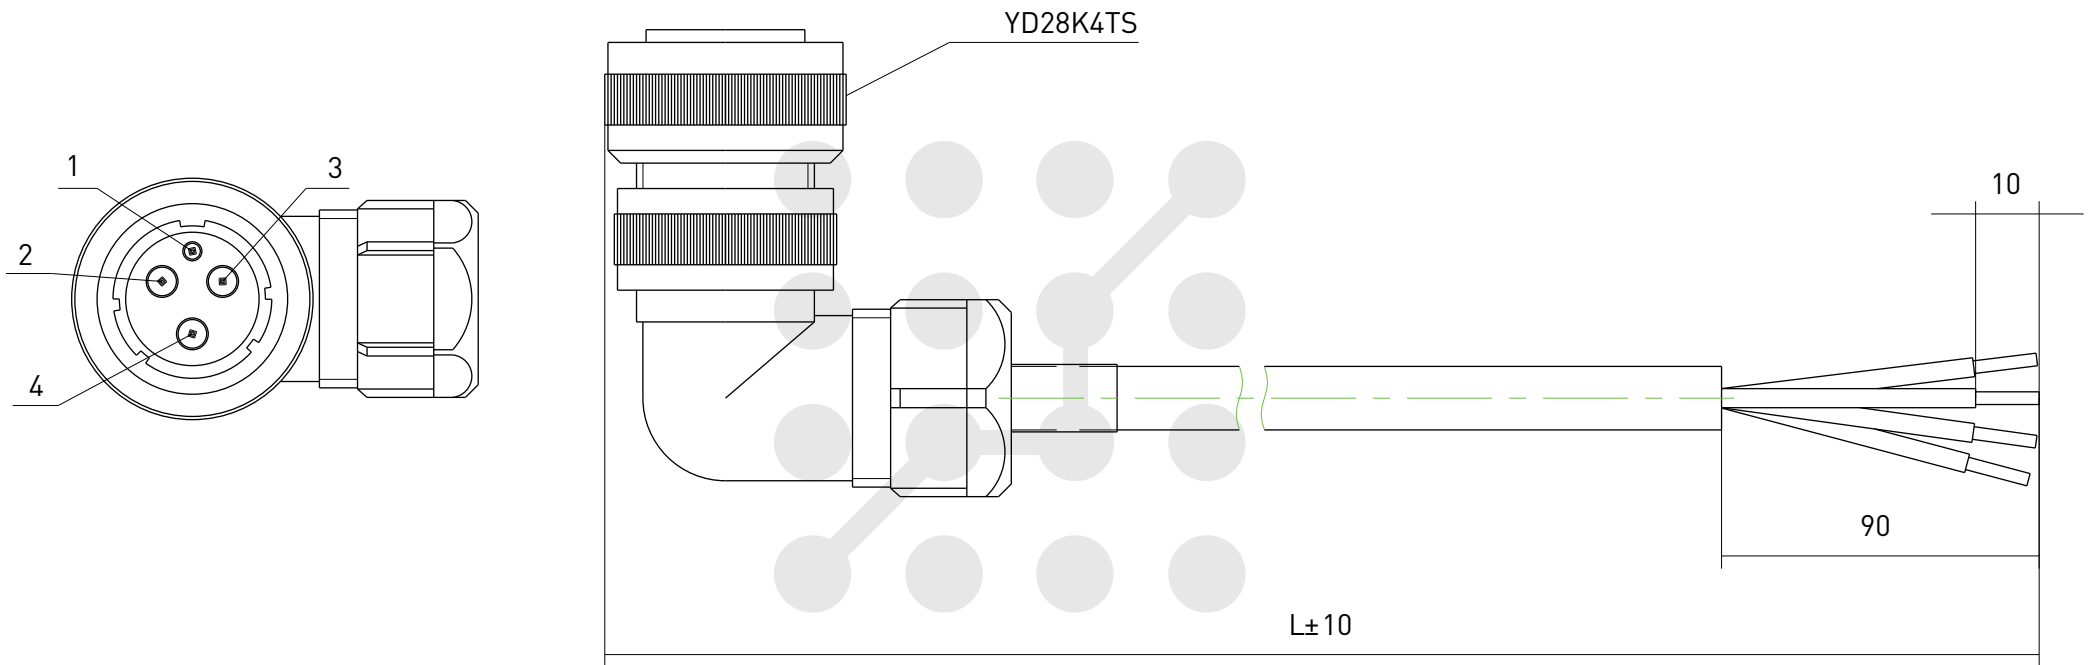


1	Зеленый	○	PE
2	Оранжевый	○	V
3	Синий	○	U
4	Красный	○	W

Обозначение	L, мм
L2P-3m	3000
L2P-6m	6000
L2P-10m	10000
CABLE-RZ3M0-H	3000
CABLE-RZ6M0-H	6000



## Энкодерные кабели

L2E-3m, L2E-6m, L2E-10m, CABLE-BM3M0-H, CABLE-BM5M0-H, CABLE-BM10M0-H


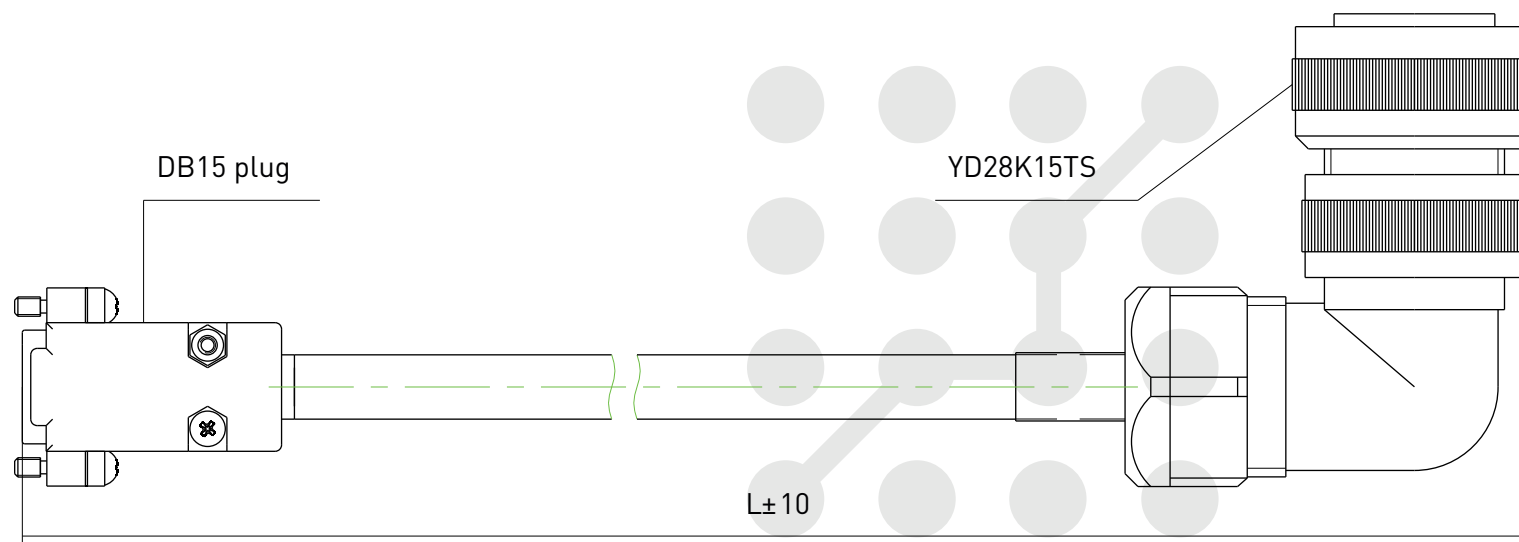


DB15	YD28K15TS	
shield	1	PE
13	2	+5V
3	3	GND
1	4	EA+
2	5	EB+
7	6	Z+
11	7	EA-
12	8	EB-
8	9	Z-
5	10	HU+
9	11	HV+
4	12	HW+
15	13	HU-
10	14	HV-
14	15	HW-


Обозначение	L, мм
L2E-3m	3000
L2E-6m	6000
L2E-10m	10000
CABLE-BM3M0-H	3000
CABLE-BM5M0-H	5000
CABLE-BM10M0-H	10000

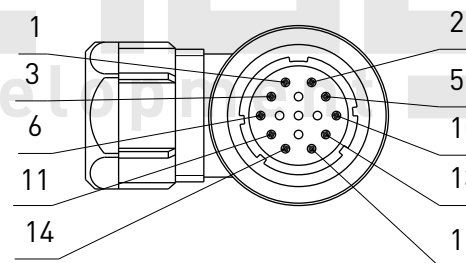

## Силовые кабели L1E-3m, L1E-6m, L1E-10m, CABLE-BM3M0-S

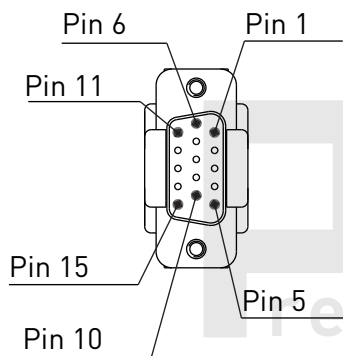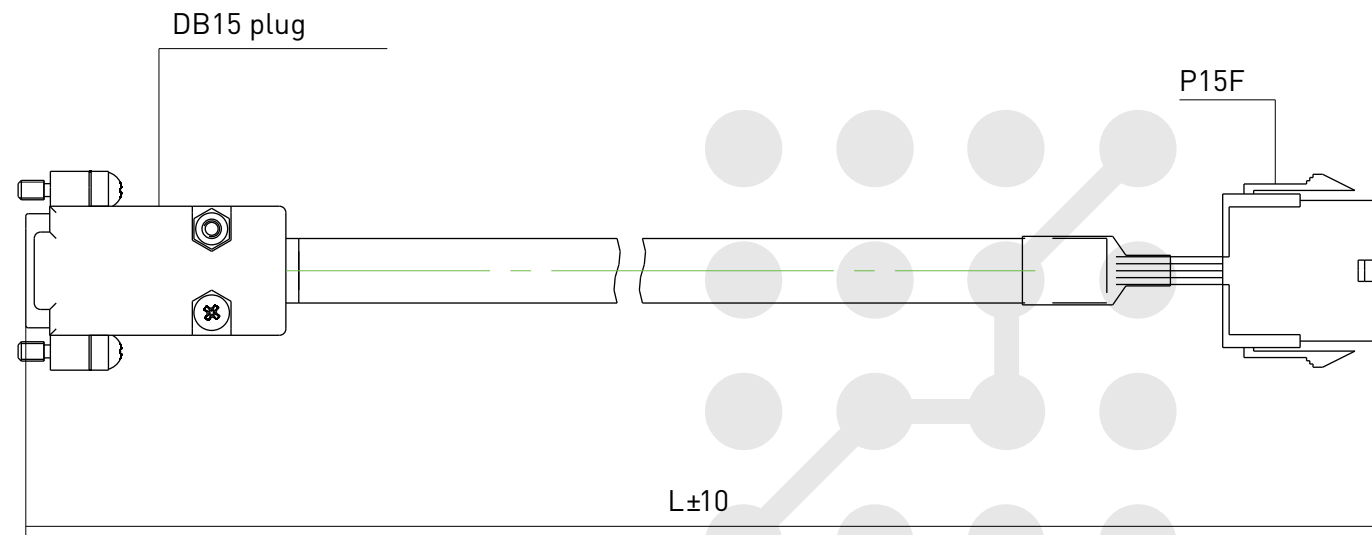


Обозначение	L
L1E-3m	3000
L1E-6m	6000
L1E-10m	10000
CABLE-BM3M0-S	3000

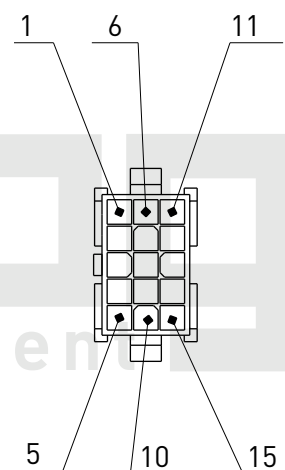

shield	1	PE
13	2	+5V
3	3	GND
2	4	EB+
8	5	Z-
5	6	HU+
7	7	Z+
15	8	HU-
1	9	EA+
9	10	HV+
4	11	HW+
10	12	HV-
11	13	EA-
12	14	EB-
14	15	HW-


## Силовые кабели L1P-3m, L1P-6m, L1P-10m

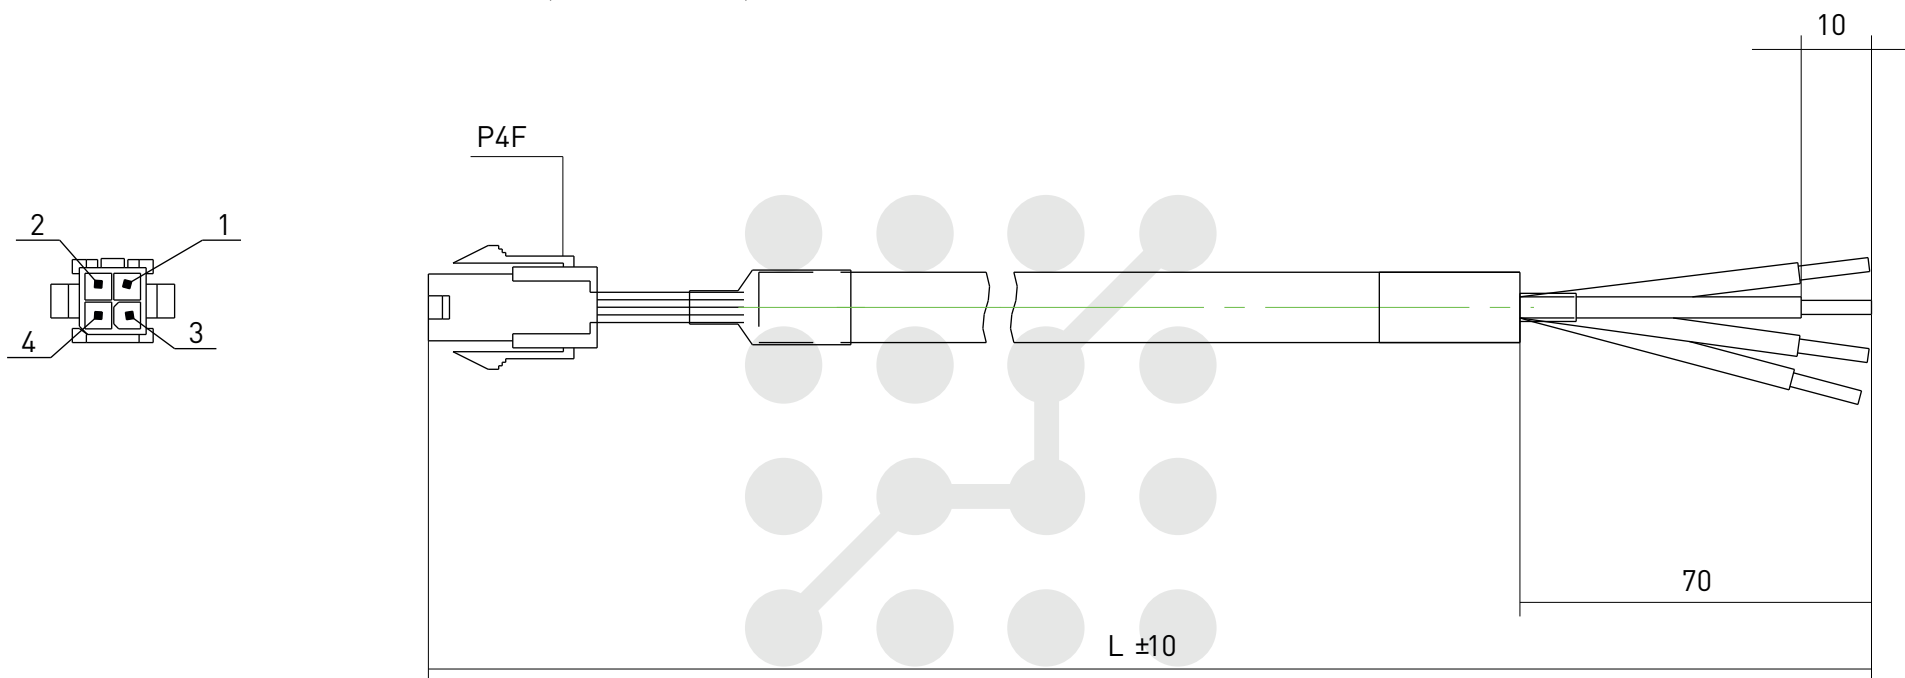

1	Синий	○	V
2	Красный	○	U
3	Оранж.	○	W
4	Зеленый	○	PE

Обо значение	L
L1P-3m	3000
L1P-6m	6000
L1P-10m	10000

## Кабели L1S-3m, L1S-6m, L1S-10m

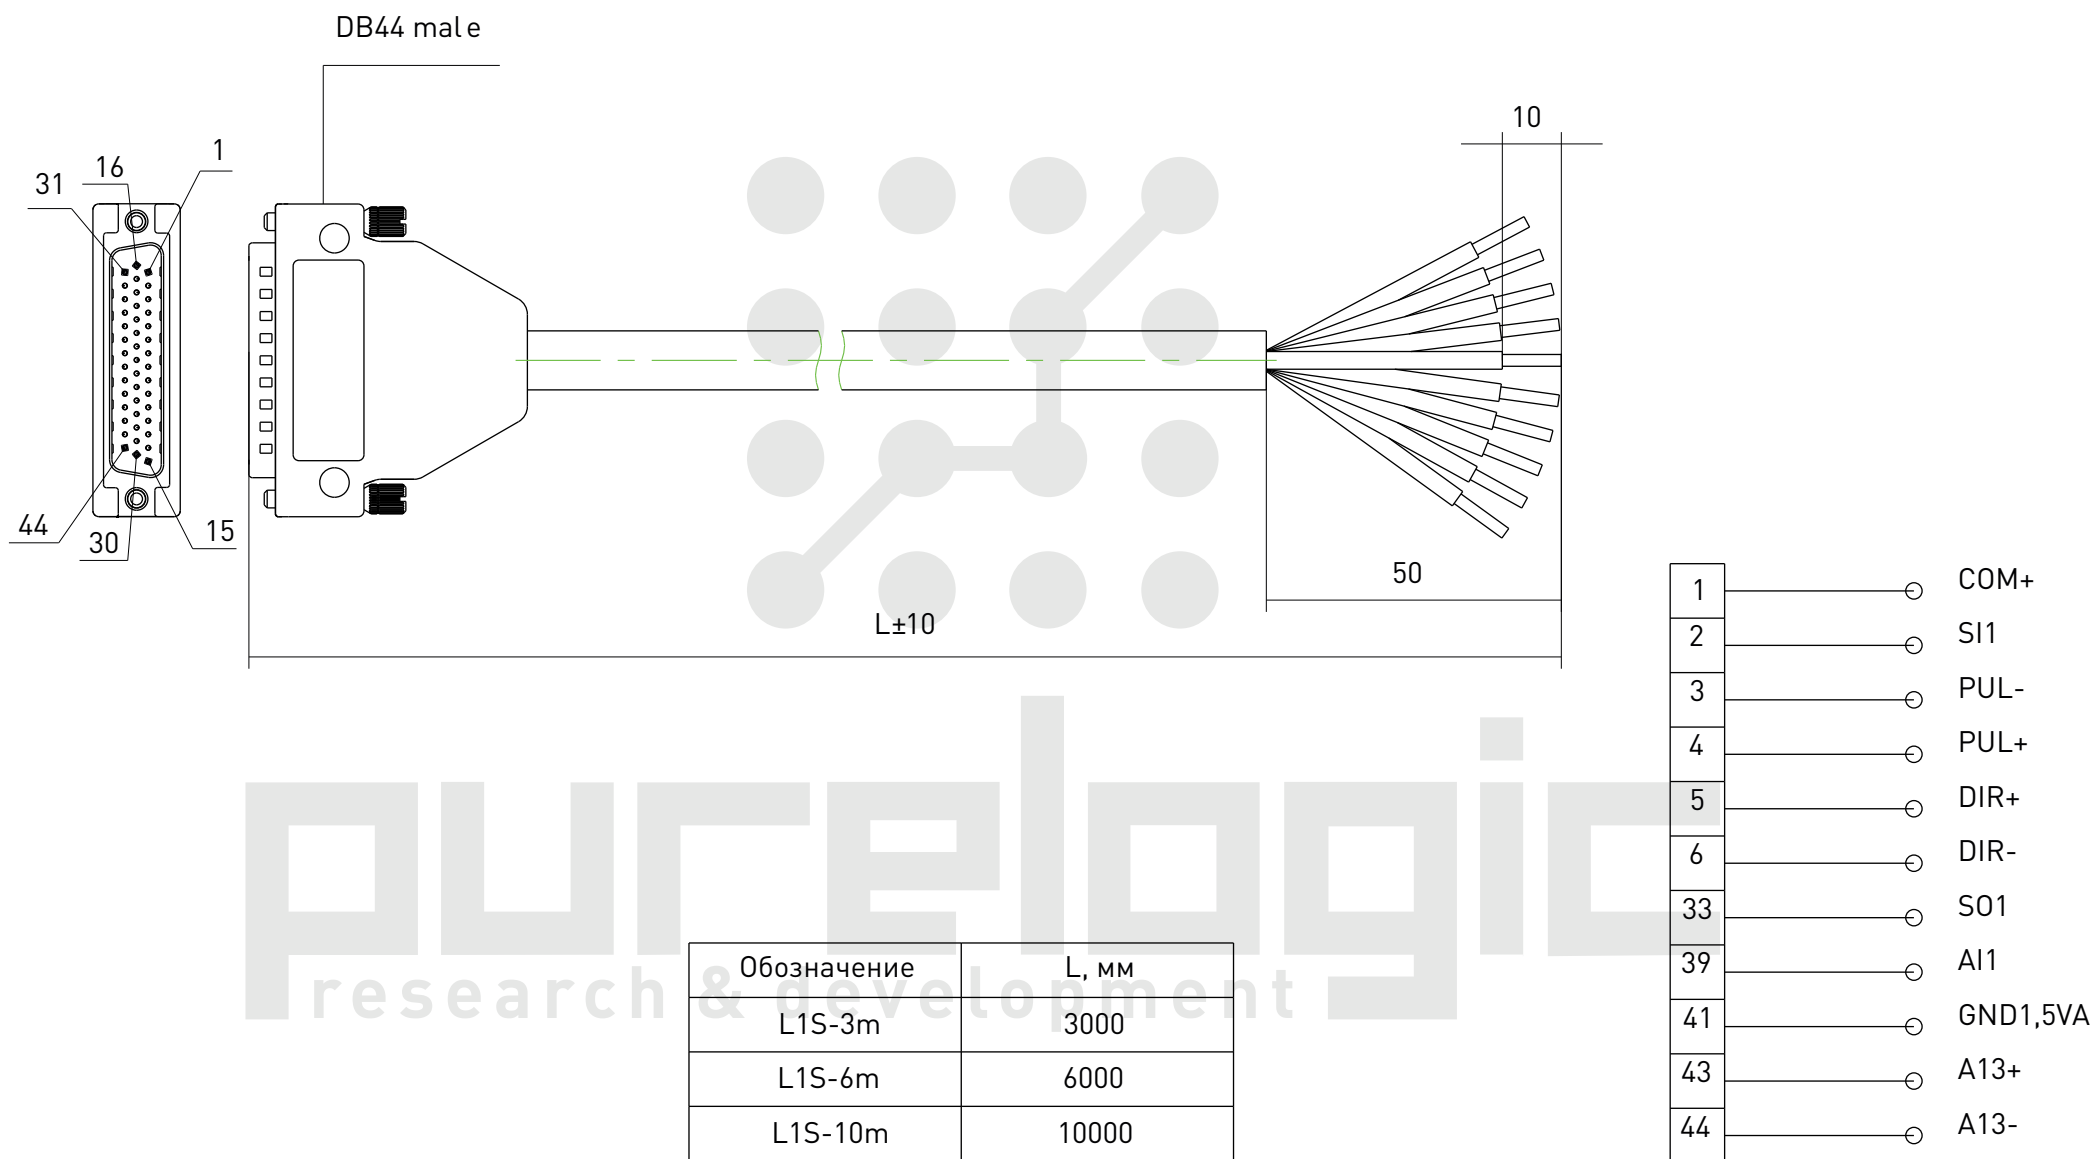

Обозначение	L, мм
L1S-3m	3000
L1S-6m	6000
L1S-10m	10000