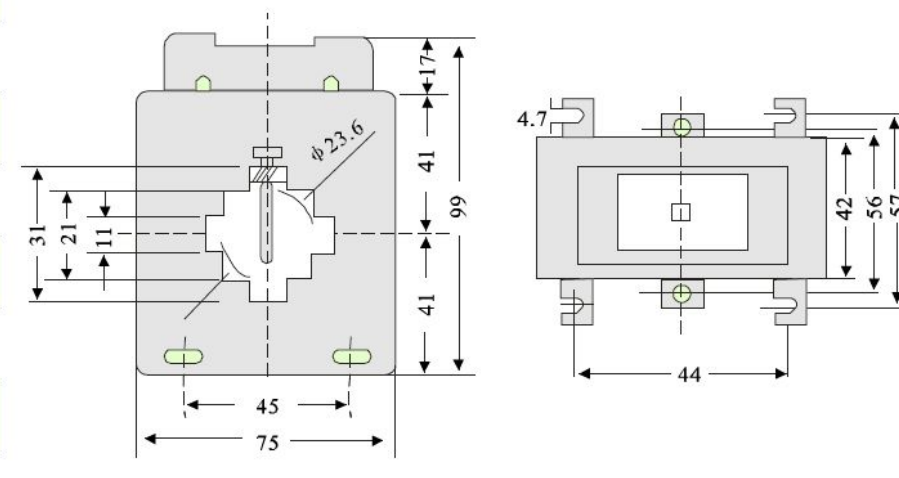


# MSQ series Current transformer

## 1.General

- 1.1 Electric ratings: AC50-60Hz,  $\leq 0.72KV$
- 1.2 Application: measurement of energy, current and relaying protection; for indoor application;
- 1.3 Mounting modes: busbar or bottom plate fixing to any direction;

### WINDOWS TYPE

Model	Rated current	Rated power(VA)		Overall and mounting dimension
		Class:0.5	Class:1	
	30/5		1	 <p>Bar (max): 30×10mm. Conductor(max): <math>\Phi 20mm</math></p>
	40/5		1	
	50/5		1	
	60/5		1	
	75/5	1	1.5	
	80/5	1.5	2.5	
	100/5	2.5	5	
	125/5	5-10	5-10	
	150/5	5-10	5-10	
	200/5	5-10	5-10	
	250/5	5-10	5-10	



MSQ-30